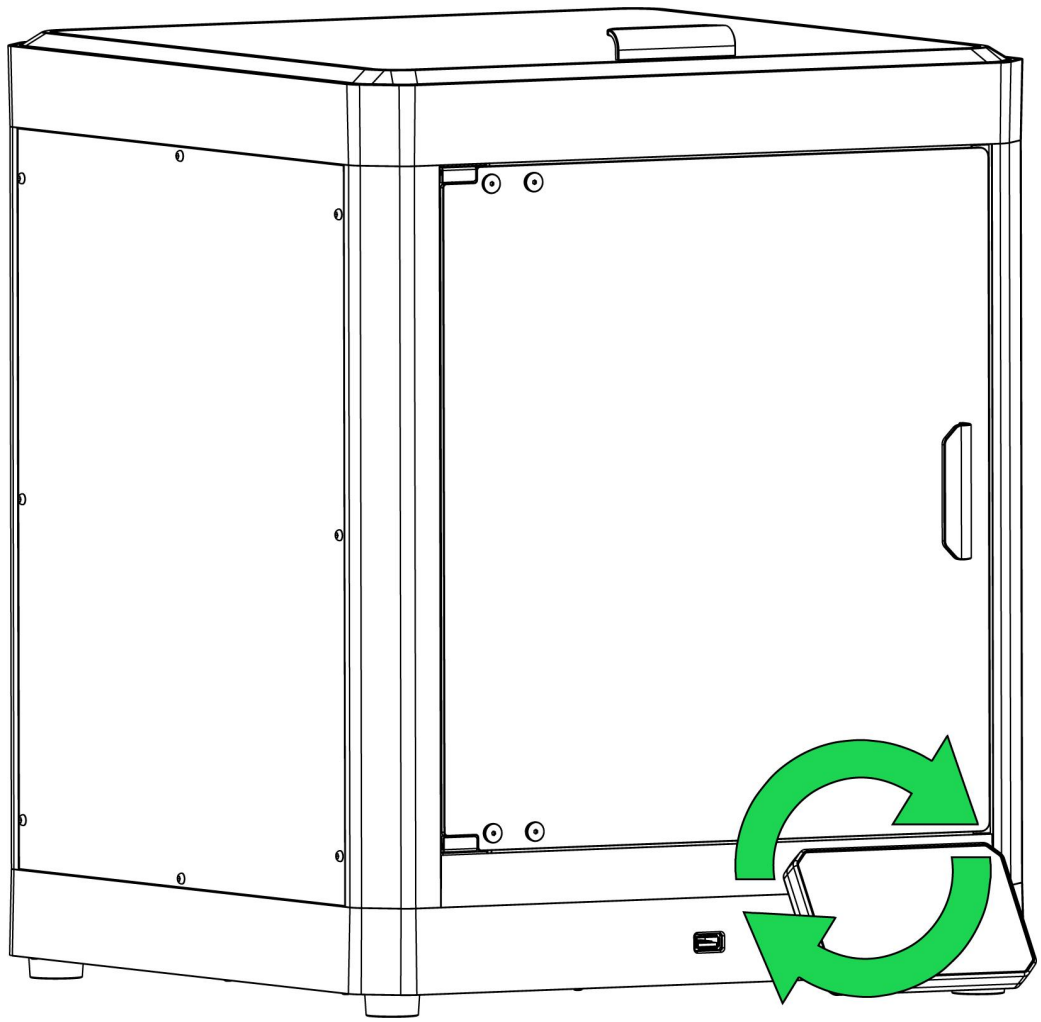



Centauri 2 3D Printer
Update firmware tutorial

Contents

Method 1: USB Disk Update……1

Method 2: OTA Update……7

Method 1: USB Disk Update

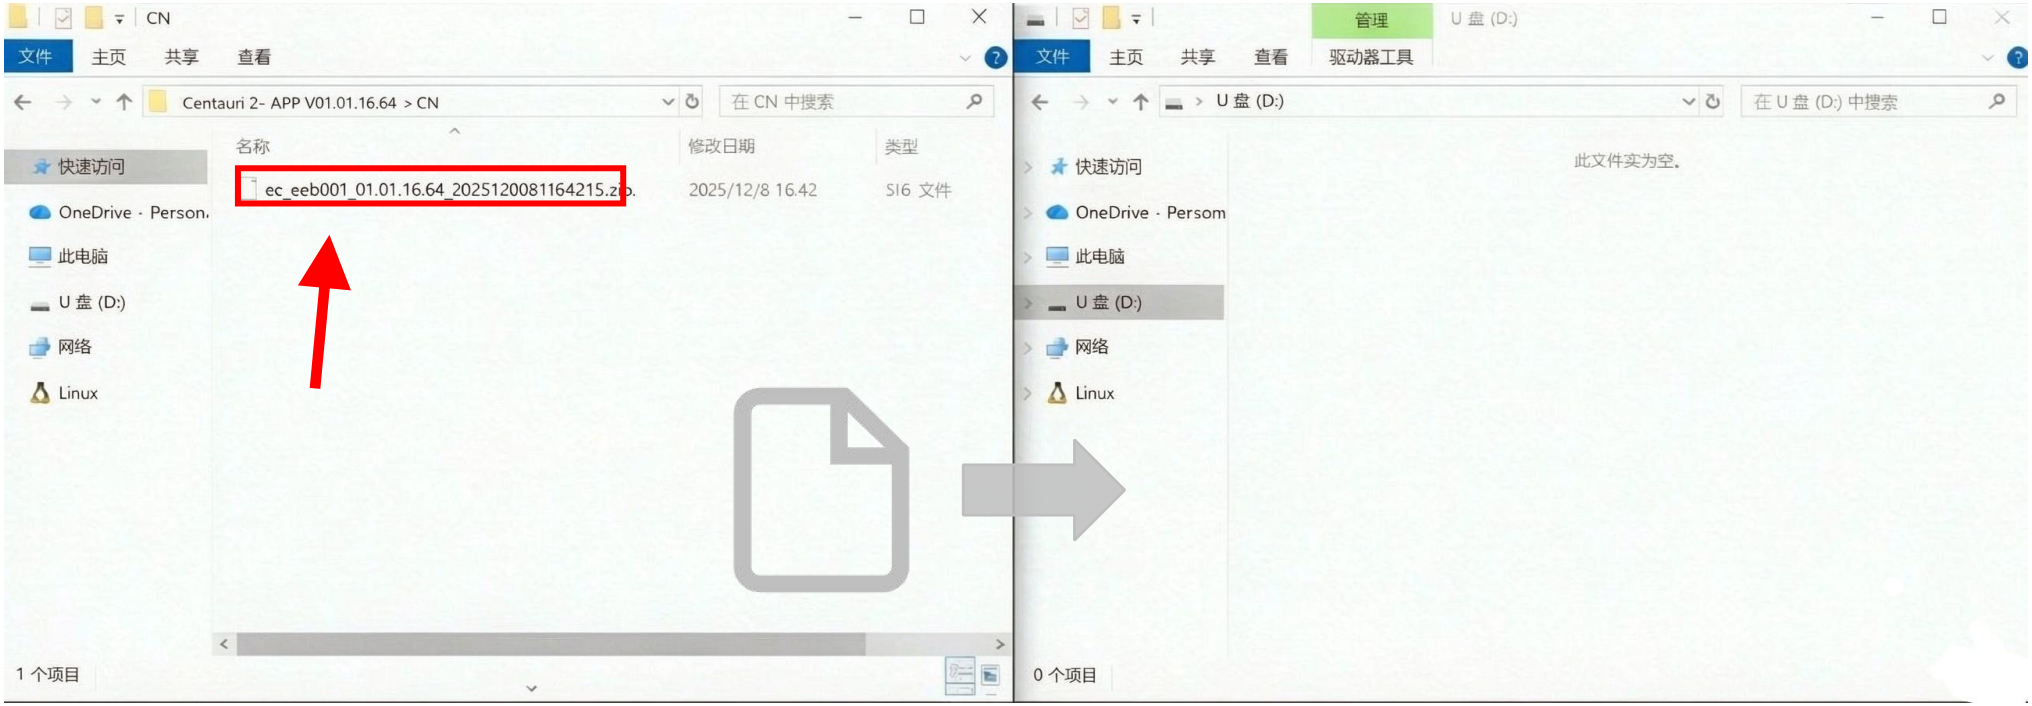


I.Copy and paste the downloaded firmware into the USB drive

Important:

1.Firmware version 02.01.01.04 includes two firmware packages. Copy both firmware files ending in .zip.sig to the root directory of the USB drive. Do not rename the files. This update must be completed before upgrading to any newer firmware version.


2.Make sure the USB drive does not contain any other files with the same names as the firmware files.

Method 1: USB Disk Update

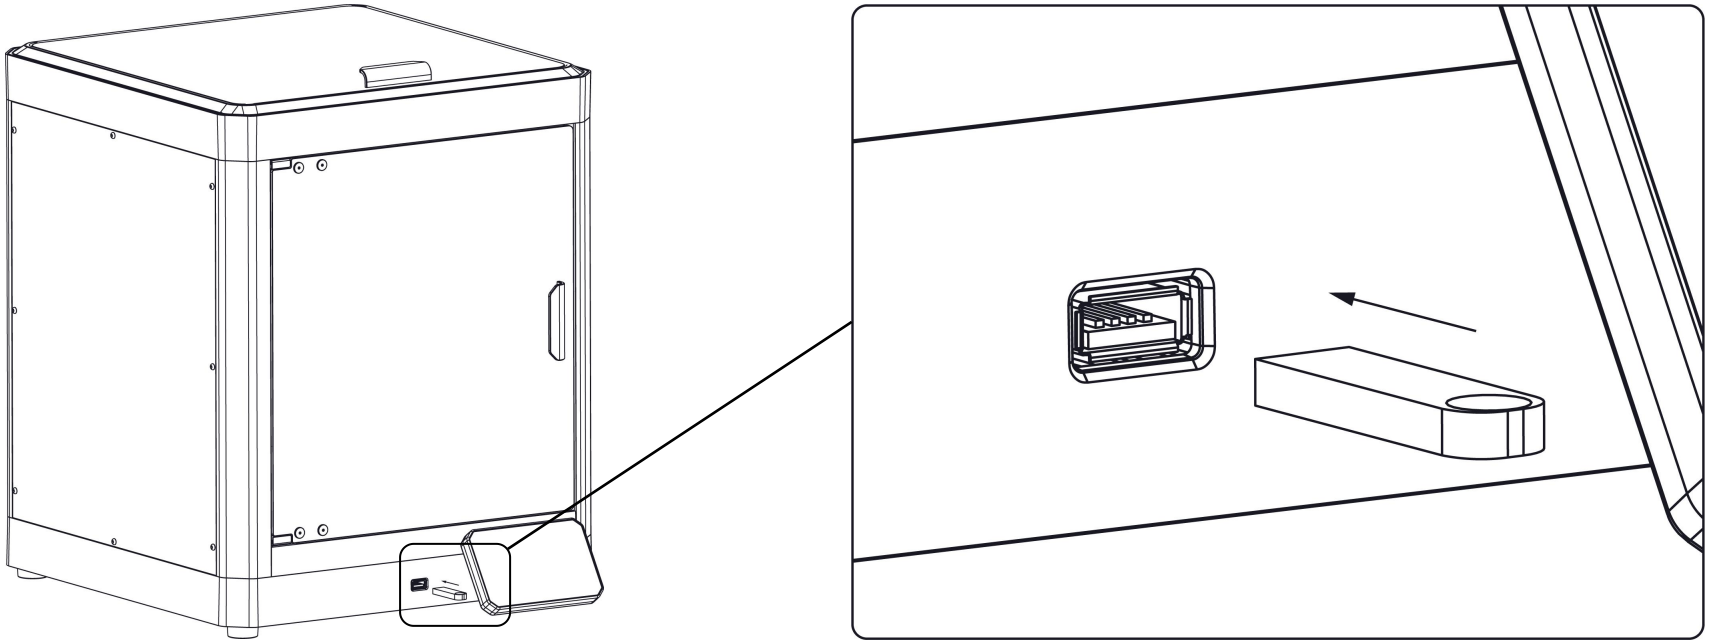

II.Turn on the machine and insert the USB flash drive into it

Method 1: USB Disk Update

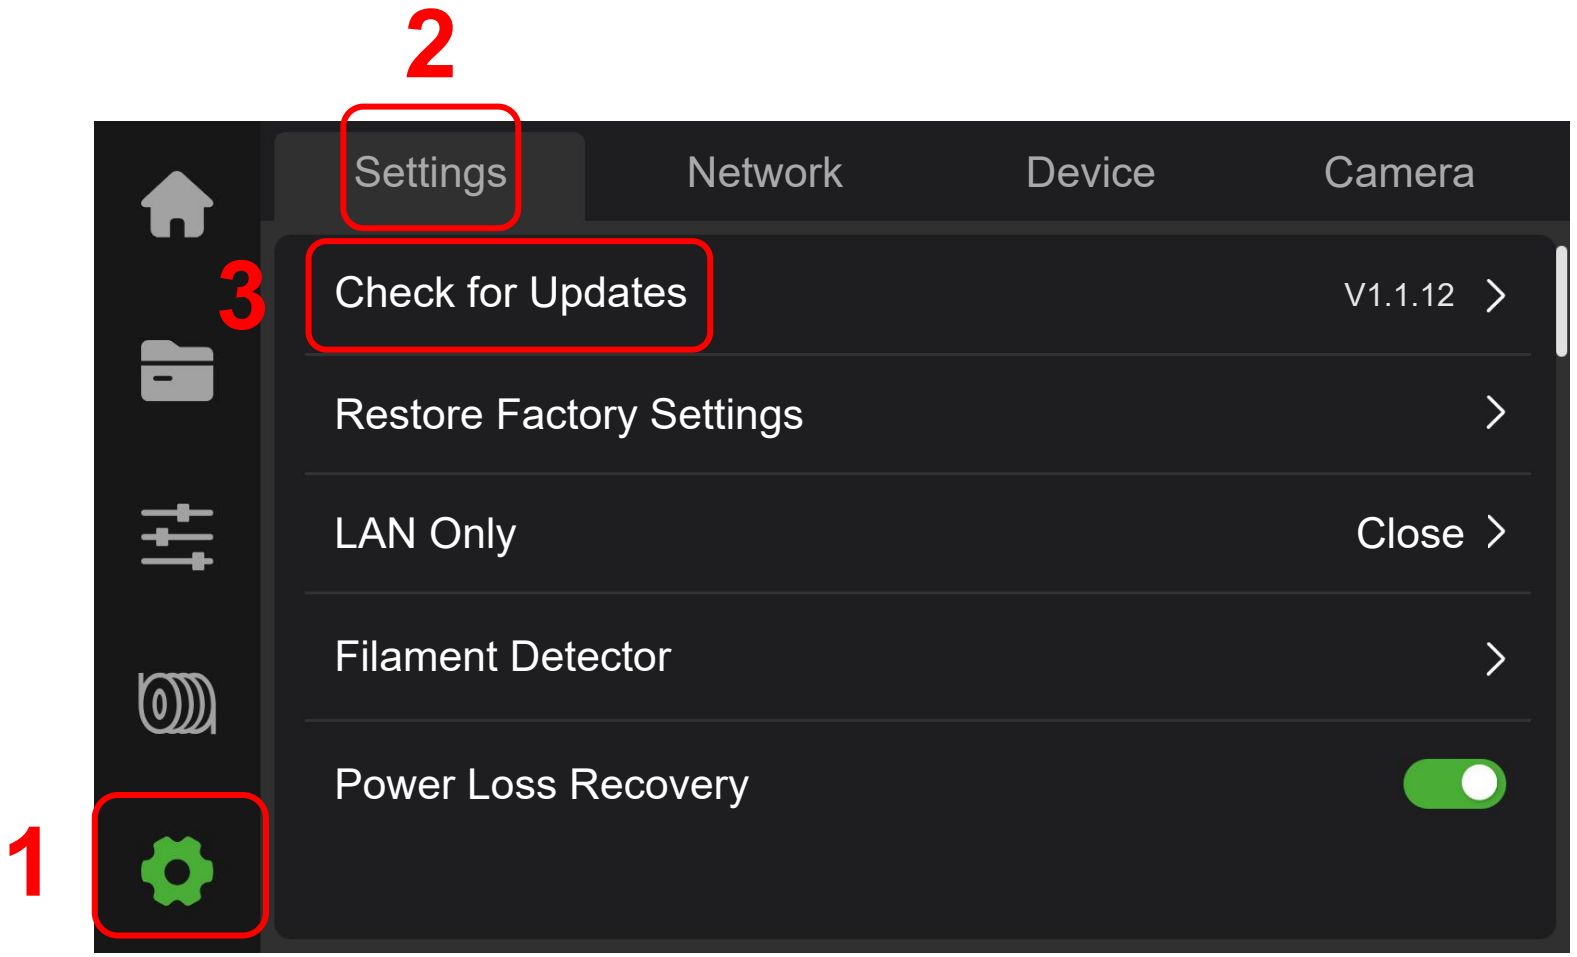

III.Click on "System" → "Settings" → "Check for Updates" in sequence


Method 1: USB Disk Update



IV.Click ”Offline Update”


A red dot in the upper-right corner of "Offline Update" indicates that an update is available.

Method 1: USB Disk Update

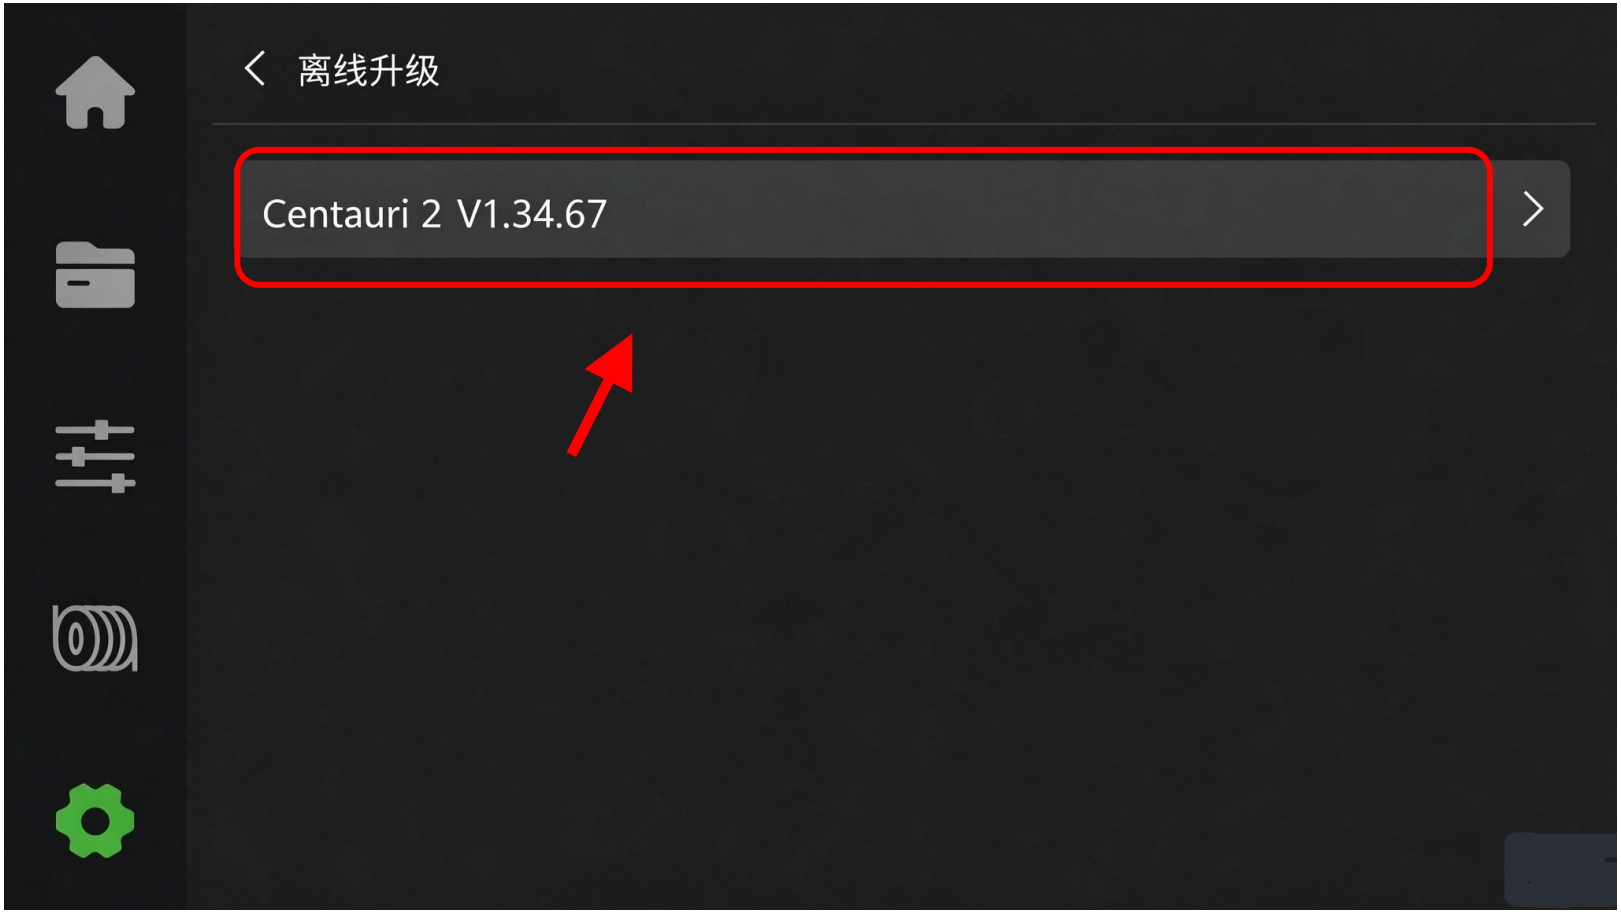

V.Select the corresponding upgrade firmware file, then click Upgrade as prompted by the pop-up window.

Method 1: USB Disk Update

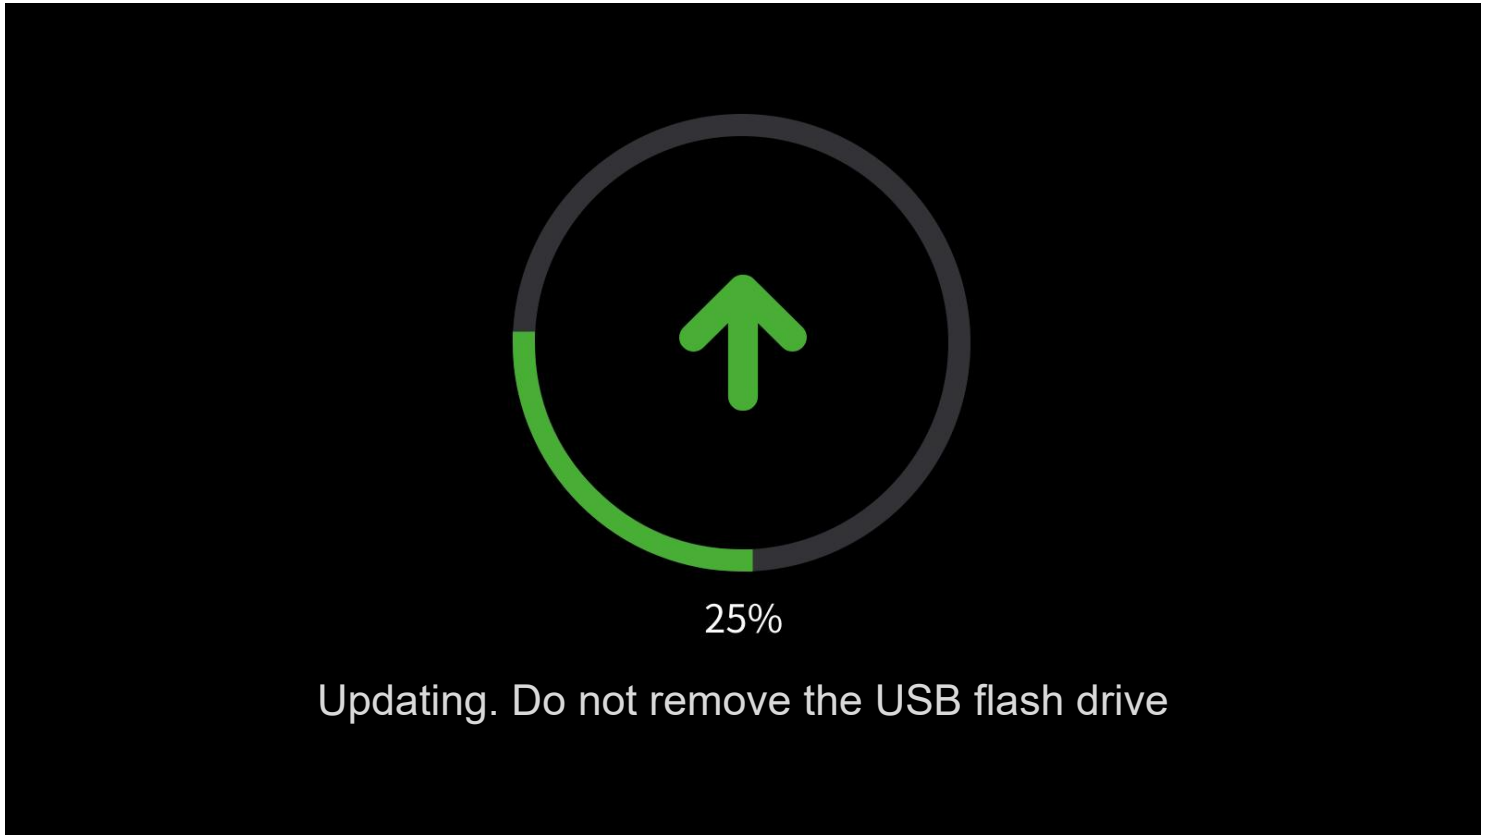


VI.Wait for the update to complete.

*Do not cut off the power supply or remove the USB drive during the upgrade; otherwise, it may result in upgrade failure or damage to the files on the USB drive.

*The device will restart automatically after the update is completed.

Method 2: OTA Update

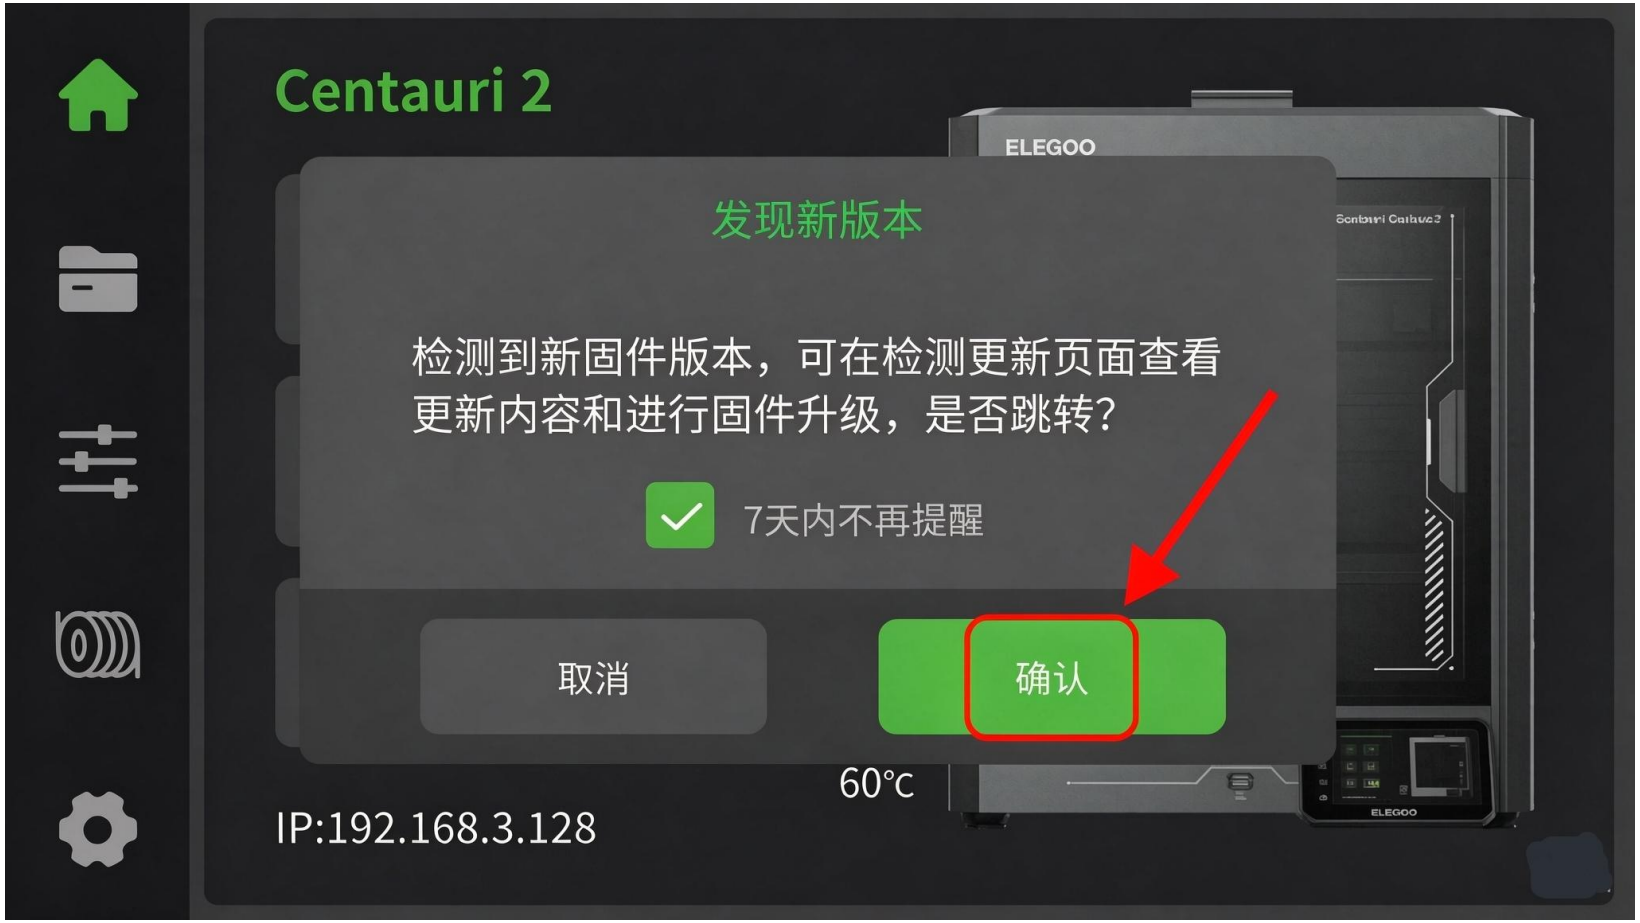

I.When a new version is available, the latest version information announcement will pop up after booting up. Click Confirm if an update is required.

Method 2: OTA Update




II.Click update

*After the update is complete, the machine will automatically restart.
If the version number becomes the latest, then the upgrade is successful.

Method 2: OTA Update

Q&A:


Q: Why doesn't my machine display a new version update announcement?
A: Please check if the machine is properly connected to the network. The new version cannot be detected when it is not connected to the network.

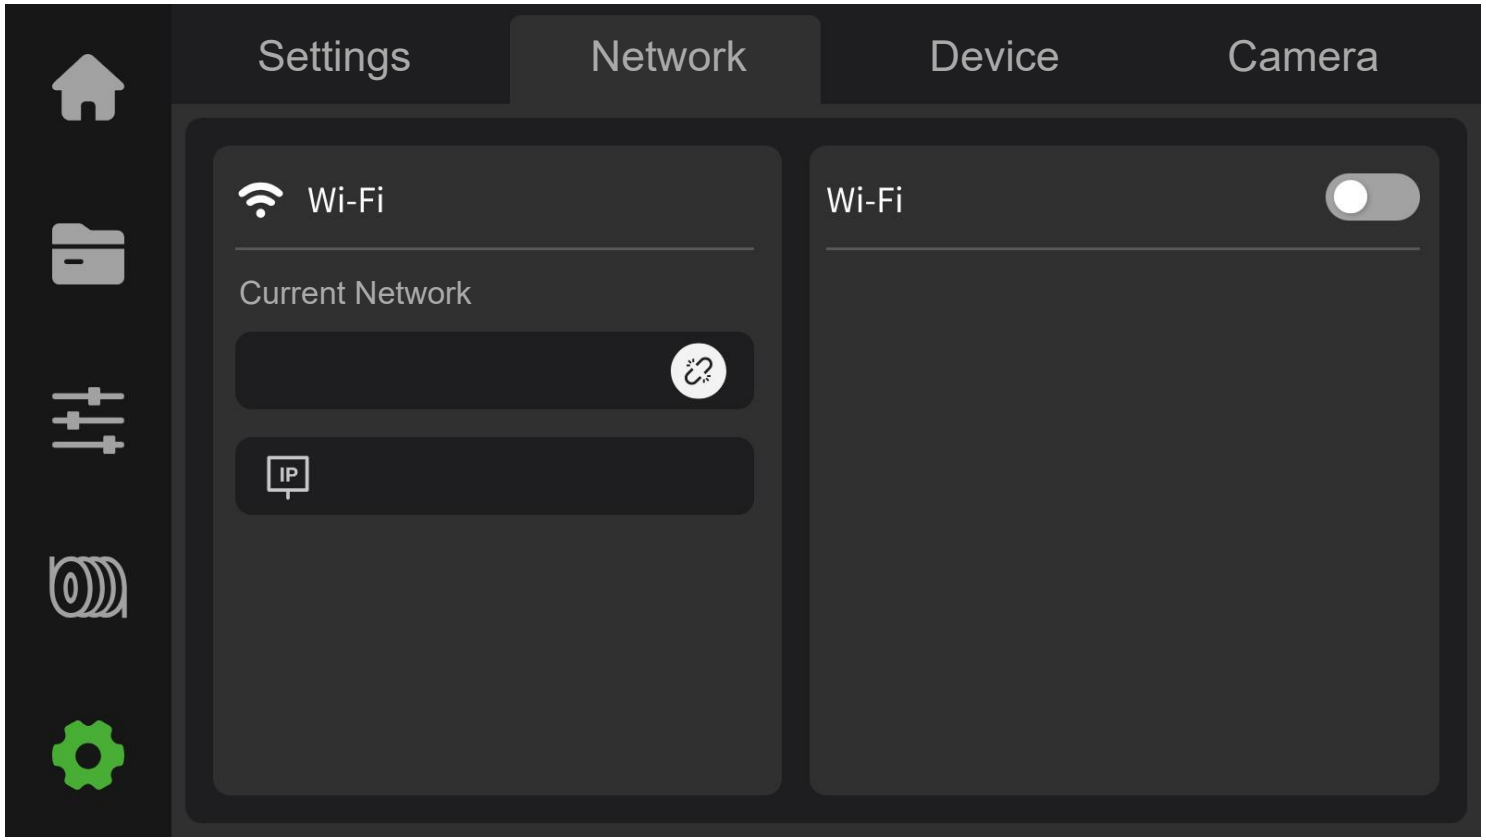

Method 2: OTA Update

Q: The new version update announcement pops up very slowly。
A: Depending on the network conditions, there may be a delay of 1-3 seconds when an update announcement pops up after booting up。

Q: If you accidentally click cancel, will the update still be displayed next time you restart?
A: After clicking cancel, a new version update notification will still pop up the next time you restart. You can also directly click "System" ->"Settings" ->"Check for Updates" on the display screen and click on the version number to update.

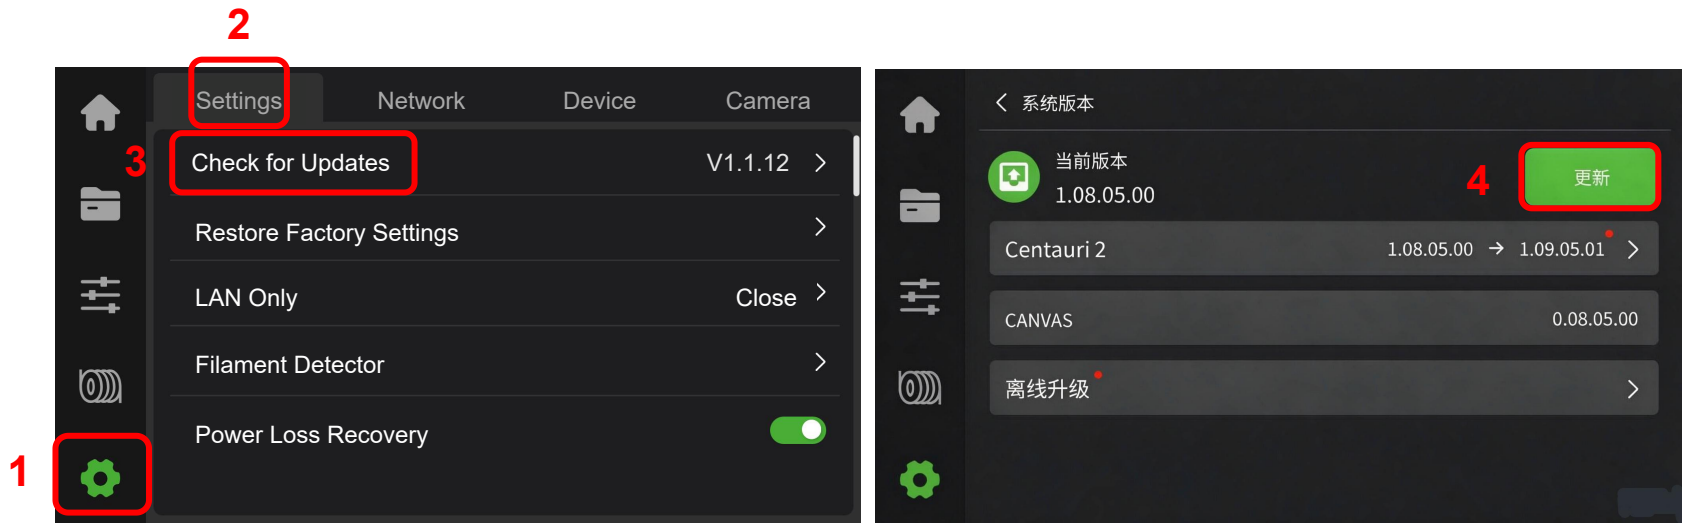

Method 2: OTA Update

Q: What should I do if the version update fails due to poor network signal, connection timeout, or abnormal connection during the process?

A: It may be caused by poor network environment or unstable connection for a short period of time. You can try to update again by restarting the machine after the network condition is restored or stabilized.

